



100 CFM - 15000 CFM

GXL SERIES






Material Selection Chart

- GX - Standard Cast Iron FG - 200 with Rotor in S.G. Iron / Ductile Iron.
- GXS - Rotor and Control Cones in 304 / 316 Stainless Steel Shaft in 410 SS
- GCSC - Body - Cladded with 316 SS Head - Cladded with 316 SS
- Optional - 316L, 410 SS, Ph. Bronze, Alloy-20

Testing Standards :

Each pump is subject to rigorous test runs at our Solid Concrete Test Bed facilities in accordance with IEC Standards for IRLUP's (WASH CRIFICE METHOD) / BS 1571 PT - 2 PNEUROPE LTD, Authenticating the Power, Vacuum and Air Displacement Parameters, each pump is certified for its performance.

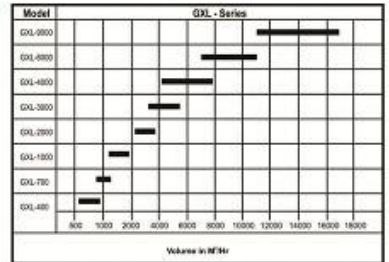

SOLID CAST STAINLESS STEEL HEAD / SIDE COVER



SOLID CAST STAINLESS STEEL BODY / CASING / WITH DPT TEST

MODEL	Dia in mm				FLANGES	
	A	B	C	D	INLET	OUTLET
GXL - 400	992	440	334	403	3"	2.5"
GXL - 700	930	571	426	540	4"	3"
GXL - 1000	1270	679	610	690	5"	4"
GXL - 2000	1500	808	636	814	6"	5"
GXL - 3000	1727	930	703	1118	8"	6"
GXL - 4000	2060	1314	1210	1240	10"	8"
GXL - 6000	2410	1420	1487	1683	12"	10"
GXL - 9000	2410	1582	1785	2057	14"	12"

Note: All dimensions are in mm and subject to change without notice